

## Sliding table saw

### minimax si x 26 A

Comfortable and precise woodworking of the highest quality for every training and craft business. Saw unit swivels 46 ° on both sides. Programmable, electric saw blade adjustment



#### Article number ▼

5508775

#### Brand ▼

Holzkraft

#### Availability ▼

No stock available

Information:

Next availability

Unknown



#### Catalog directory ▼

Woodworking machinery » Circular saw /  
Sliding table saws » Sliding table saws »  
minimax si x


#### Purchase ▼

Minimum 1 pc(s).

#### Shipping informations ▼

Packaging Metrics		Weights		Delivery		Other	
Length	1,300 mm	Gross	827 kg	Delivery	Carrier	DualUse	✘
Width	2,680 mm	Net	822 kg	Content	1 pc(s).	SCIP	n/a
Height	1,380 mm					SVHC	No

#### Root data ▼

Country of origin	EAN	Custom number	Quantity unit
 Italy	4036351243496	84659120	pc(s).



MADE IN ITALY

#### Description ▼

- Control unit with electronic display for programmed, motorised height adjustment and tilting of the sawing unit
- Cast iron saw unit warrants torsional rigidity and vibration-free operation
- Sawing unit with permanently precise double swivel segment guide, 6 years Holzkraft warranty on wear of the swivel segments
- Large edging frame with roller facilitates panel feeding
- Telescopic ruler with two professional folding stops
- Smooth-running and precise sliding carriage made of anodized aluminium with proven and permanently smooth-running ball contact system on hardened steel guide tracks, 10-year warranty on wear of the guide tracks
- Scoring device equipped with its own drive and easily adjustable from the outside
- Two-position saw blade anti-sway device manually adjustable
- A 3 version with three-axis control additionally equipped with motorized rip fence with electronic positioning, position indication via encoder, adjustment via ball screw, infinitely variable adjustment via switch or automatic positioning and possibility of incremental adjustment
- UP version with swivelling control panel for maximum flexibility
- X-version with Complex mitre fence for fast and accurate execution of mitre cuts, automatic compensation of the fence position. (length compensation)
- Optionally available: two saw blade speeds, cross-cut fence with digital display
- Made in Italy

## Significant Features ▼



## Media informations ▼

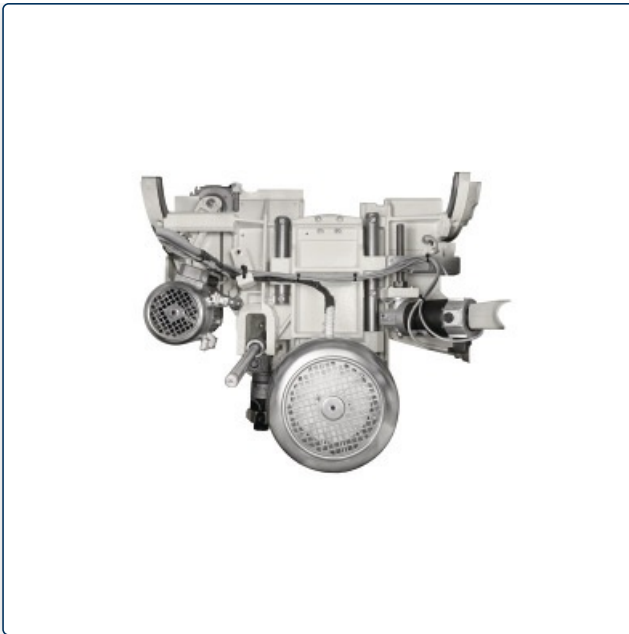


Fig. shows the position of the operating panel of models A / A3



### Simple and fast

- Programmed movement
- The "Ready" control allows the powered and programmed movement of the saw blade unit (from model A3 also of the rip fence), which increases productivity and the quality of work



### Cast iron saw unit with two-sided swivel segment guide

- Now even more solid, vibration-free and with smoother running
- Zero-point swivel
- Height and double-sided up to 46 ° inclinable
- Standard with scoring unit and powerful industrial motor



### Saw blade adjustment

- Zero-point tilting
- Height and up to 46° tilt adjustable



### Sawing unit with swivel segment guide

- Durable precision due to double swivel segment guide
- 6-year Holzskraft warranty on wear of the swivel segments



### Aluminium sliding table

- Equipped with thousandfold proven ball contact system
- Permanently smooth running
- Insensitive to dust and dirt due to minimal contact point between ball and trapezoidal rail
- 10 years Holzskraft warranty on wear of the guideways



**Saw blade pendulum guard**

- With suction hood
- Two positions
- Manually adjustable



**Aluminum sliding carriage**

- Equipped with a thousand times proven ball contact system
- Permanently smooth-running
- Dust- and dirt-resistant due to minimal contact point between ball and trapezoidal rail
- 10-year HOLZKRAFT warranty on guideway wear



**Saw unit with swivel segment guide**

- Durable precision thanks to double swivel segment guide
- 6-year HOLZKRAFT warranty on wear of swivel segments

## Technical data ▼

Extraction port			
Extraction port diameter bottom	120 mm	Saw blade protection extraction port diameter	80 mm
Footprint			
Transport width	1250 mm		
Electrical Data			
Supply voltage	400 V	Mains frequency	50 Hz
Drive motor output	7 kW	Duty type drive motor	S6
Duty cycle drive motor	40 %		
Sliding carriage and table			
Trimming frame length	1200 mm	Trimming frame width	650 mm
Sliding carriage length	2600 mm	Sliding carriage width	360 mm
Sliding carriage height	142 mm	Table length	1000 mm
Table width	685 mm		
Circular saw unit			
Max. cutting width with rip fence	1270 mm	Max. cross cut width left from saw blade	3260 mm
Trimming length	2600 mm	Saw blade angle	-46 – 46 °
Max. cutting height 90°	136.5 mm	Max. cutting height 45°	97 mm
Max. cutting height -45°	60 mm	(Main) saw blade diameter	400 mm
Explanation to: (Main) saw blade diameter	Independent of the scoring unit	(Main) saw blade speed	4000 min <sup>-1</sup>
Pre-scoring unit			
Diameter scoring saw blade	160 mm		

## Equipment ▼

Scoring saw unit	with separate scoring motor	Anodised aluminium sliding sizing carriage	✓
Handle for sliding carriage	✓	On/off switch on sliding carriage	✓
Material roll on claming frame	✓	Saw rip fence	with round rod guide
Stops	Professional folding stops	Clamp sleigh	✓
Eccentric clamp	✓	Table broadening	✓
Table lengthening	✓	Saw blade pendulum protection	✓

## Accessories ▼



### Circular saw blade set

#### 400 mm

HOLZKRAFT sizing saw blades comply with the highest quality level especially for industrial applications on stationary machines



**Article number** ▼

5260400

**Availability** ▼

No stock available  
Information:  
Next availability  
Unknown

**Purchase** ▼

Minimum 1 pc(s).

**Price informations** ▼



### Mitre fence 1060 mm, with telescopic guide



Article number ▼  
5514315

Availability ▼  
No stock available  
Information:  
Next availability  
Expected on  
calendar week  
14/2024

Purchase ▼  
Minimum 1 pc(s).

Price informations ▼



### Additional work table on the sledge



Article number ▼  
5510402

Availability ▼  
In stock  
Immediate delivery

Purchase ▼  
Minimum 1 pc(s).

Price informations ▼

## Options equipment ▼



### Digital display of the working width at the rip fence PA-DIGI-SI



Article number ▼  
5514349

Availability ▼  
No stock available  
Information:  
Next availability  
Unknown

Purchase ▼  
Minimum 1 pc(s).

Price informations ▼



### Degree grid division on the trimming frame



Article number ▼  
5510403

Availability ▼  
No stock available  
Information:  
Next availability  
Unknown

Purchase ▼  
Minimum 1 pc(s).

Price informations ▼



### Longitudinal stop with three LCD displays of the stop position



Article number ▼  
5514392

Availability ▼  
No stock available  
Information:  
Next availability  
Unknown

Purchase ▼  
Minimum 1 pc(s).

Price informations ▼



## Trimming frame with CompeX device



**Article number** ▼

5514380

**Availability** ▼

In stock  
Immediate delivery

**Purchase** ▼

Minimum 1 pc(s).

**Price informations** ▼

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.