

Sliding table saw

minimax si x 32 A 3

Comfortable and precise woodworking of the highest quality for every training and craft business. Saw unit swivels 46 ° on both sides. Programmable, electric saw blade adjustment



Article number ▾

5508781

Brand ▾

Holzkraft

Availability ▾

No stock available

Information:

Next availability

Unknown



Catalog directory ▾

Woodworking machinery » Circular saw /
Sliding table saws » Sliding table saws »
minimax si x


Purchase ▾

Minimum 1 pc(s).

Shipping informations ▾

| Packaging Metrics | | Weights | | Delivery | | Other | |
|-------------------|----------|---------|--------|----------|----------|---------|-----|
| Length | 1,260 mm | Gross | 870 kg | Delivery | Carrier | DualUse | ✘ |
| Width | 3,280 mm | Net | 865 kg | Content | 1 pc(s). | SCIP | n/a |
| Height | 1,420 mm | | | | | SVHC | No |

Root data ▾

| Country of origin | EAN | Custom number | Quantity unit |
|---|---------------|---------------|---------------|
|  Italy | 4036351243533 | 84659120 | pc(s). |



MADE IN ITALY

Description ▾

- Control unit with electronic display for programmed, motorised height adjustment and tilting of the sawing unit
- Cast iron saw unit warrants torsional rigidity and vibration-free operation
- Sawing unit with permanently precise double swivel segment guide, 6 years Holzkraft warranty on wear of the swivel segments
- Large edging frame with roller facilitates panel feeding
- Telescopic ruler with two professional folding stops
- Smooth-running and precise sliding carriage made of anodized aluminium with proven and permanently smooth-running ball contact system on hardened steel guide tracks, 10-year warranty on wear of the guide tracks
- Scoring device equipped with its own drive and easily adjustable from the outside
- Two-position saw blade anti-sway device manually adjustable
- A 3 version with three-axis control additionally equipped with motorized rip fence with electronic positioning, position indication via encoder, adjustment via ball screw, infinitely variable adjustment via switch or automatic positioning and possibility of incremental adjustment
- UP version with swivelling control panel for maximum flexibility
- X-version with Complex mitre fence for fast and accurate execution of mitre cuts, automatic compensation of the fence position. (length compensation)
- Optionally available: two saw blade speeds, cross-cut fence with digital display
- Made in Italy

Significant Features ▼



Media informations ▼

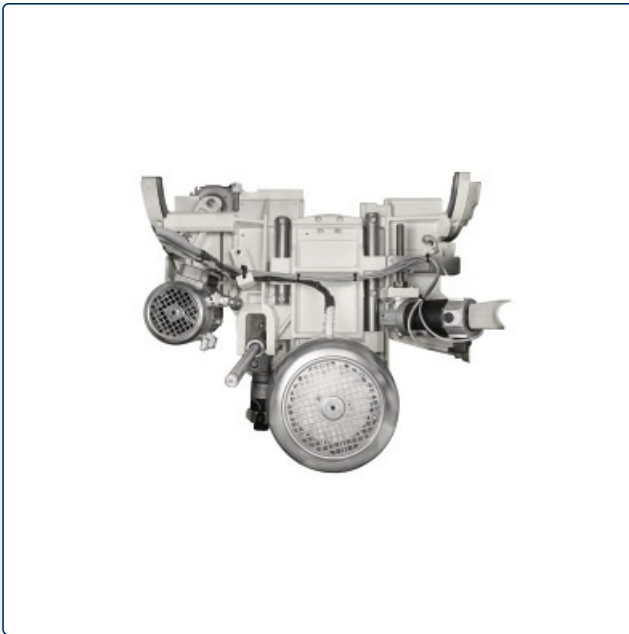


Fig. shows the position of the operating panel of models A / A3



Simple and fast

- Programmed movement
- The "Ready" control allows the powered and programmed movement of the saw blade unit (from model A3 also of the rip fence), which increases productivity and the quality of work



Cast iron saw unit with two-sided swivel segment guide

- Now even more solid, vibration-free and with smoother running
- Zero-point swivel
- Height and double-sided up to 46 ° inclinable
- Standard with scoring unit and powerful industrial motor



Saw blade adjustment

- Zero-point tilting
- Height and up to 46° tilt adjustable



Sawing unit with swivel segment guide

- Durable precision due to double swivel segment guide
- 6-year Holzkraft warranty on wear of the swivel segments



Aluminium sliding table

- Equipped with thousandfold proven ball contact system
- Permanently smooth running
- Insensitive to dust and dirt due to minimal contact point between ball and trapezoidal rail
- 10 years Holzkraft warranty on wear of the guideways



Saw blade pendulum guard

- With suction hood
- Two positions
- Manually adjustable


Technical data ▾

| Extraction port | | | |
|---|---------------------------------|---|------------------------|
| Extraction port diameter bottom | 120 mm | Saw blade protection extraction port diameter | 80 mm |
| Footprint | | | |
| Transport width | 1250 mm | | |
| Electrical Data | | | |
| Supply voltage | 400 V | Mains frequency | 50 Hz |
| Drive motor output | 7 kW | Duty type drive motor | S6 |
| Duty cycle drive motor | 40 % | | |
| Sliding carriage and table | | | |
| Trimming frame length | 1200 mm | Trimming frame width | 650 mm |
| Sliding carriage length | 3200 mm | Sliding carriage width | 360 mm |
| Sliding carriage height | 142 mm | Table length | 1000 mm |
| Table width | 685 mm | | |
| Circular saw unit | | | |
| Max. cutting width with rip fence | 1270 mm | Max. cross cut width left from saw blade | 3260 mm |
| Trimming length | 3200 mm | Saw blade angle | -46 – 46 ° |
| Max. cutting height 90° | 136.5 mm | Max. cutting height 45° | 97 mm |
| Max. cutting height -45° | 60 mm | (Main) saw blade diameter | 400 mm |
| Explanation to: (Main) saw blade diameter | Independent of the scoring unit | (Main) saw blade speed | 4000 min ⁻¹ |
| Pre-scoring unit | | | |
| Diameter scoring saw blade | 160 mm | | |

Equipment ▾

| | | | |
|--------------------------------|-----------------------------|--|----------------------|
| Scoring saw unit | with separate scoring motor | Anodised aluminium sliding sizing carriage | ✓ |
| Handle for sliding carriage | ✓ | On/off switch on sliding carriage | ✓ |
| Material roll on claming frame | ✓ | Saw rip fence | with round rod guide |
| Stops | Professional folding stops | Clamp sleigh | ✓ |
| Eccentric clamp | ✓ | Control of saw blade height, tilting and rip fence | ✓ |
| Table broadening | ✓ | Table lengthening | ✓ |
| Saw blade pendulum protection | ✓ | | |

Accessories ▼



Circular saw blade set 400 mm

HOLZKRAFT sizing saw blades comply with the highest quality level especially for industrial applications on stationary machines



Article number ▼
5260400

Availability ▼
No stock available
Information:
Next availability
Unknown

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Mitre fence 1060 mm, with telescopic guide



Article number ▼
5514315

Availability ▼
No stock available
Information:
Next availability
Expected on
calendar week
14/2024

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Additional work table on the sledge



Article number ▼
5510402

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼

Options equipment ▼



Digital display of the working width at the rip fence PA-DIGI-SI




Article number ▼
5514349

Availability ▼
No stock available
Information:
Next availability
Unknown

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Degree grid division on the trimming frame



Article number ▼
5510403

Availability ▼
No stock available
Information:
Next availability
Unknown

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Longitudinal stop with three LCD displays of the stop position



Article number ▼
5514392

Availability ▼
No stock available
Information:
Next availability
Unknown

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Trimming frame with CompeX device



Article number ▼
5514380

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.